



the future is safer with altro

Altro Symphonia[™]



Exceptionally smooth, beautiful and easy to care for flooring

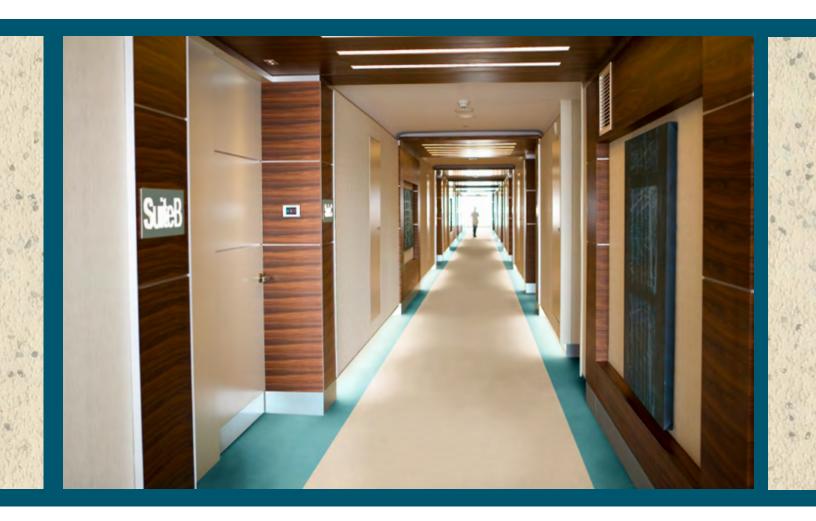





Iceberg PH2003 LRV 61 WR284 / AM01



Crystal PH2007 LRV 64 WR284 / AM01




Vapor PH2004 LRV 43 WR191 / AM191




Flurry PH2012 LRV 30 WR402 / AM81



Squall PH2011 LRV 28 WR372 / AM81



Swordfish PH2037 LRV 25 WR410 / AM84




Coyote PH2015 LRV 21 WR373 / AM86


Tulip

PH2032

WR380 / AM238



Manatee PH2016 LRV 16 WR403 / AM82



LRV 43

Chipmunk PH2020 LRV 13 WR232 / AM82



Koala LRV 12 PH2019 WR404 / AM82



Shore PH2005 LRV 51 WR283 / AM20





Rye PH2002 LRV 42 WR400 / AM265



LRV 10

Pony PH2001 LRV 52 WR267 / AM20



Bubble Gum PH2036 LRV 17 WR276 / AM276

Caribou

WR282 / AM239

LRV 25

PH2009



Owl PH2041 LRV 40 WR20 / AM20

Falcon

PH2006

WR401 / AM20

LRV 40







Colt PH2013 LRV 23 WR282 / AM239

Frozen PH2008

WR374 / AM79



Sable PH2030 LRV 6 WR408 / AM100



Clementine PH2024 LRV 20 WR273 / AM273




Whirlpool PH2029 LRV 10 WR407 / AM73



Magma PH2018 LRV 7 WR260 / AM260




Saffron PH2028 LRV 15 WR406 / AM42




Wild Flower PH2026 LRV 17 WR194 / AM71






Margarita PH2035 LRV 42 WR381 / AM381



Caterpillar PH2031 LRV 19 WR377 / AM308



Foal PH2017 LRV 7 WR260 / AM260



PH2022 LRV 27 WR272 / AM272



PH2034 LRV 22 WR270 / AM56



Brook LRV 14 PH2038 WR376 / AM302


Cantaloupe

WR405 / AM271

LRV 31

PH2023















Pine Cone

WR371 / AM371

LRV 14

LRV 32


PH2014

Geyser

PH2021

WR285 / AM203

PH2025 LRV 19 WR194 / AM71



Porpoise PH2033 LRV 24 WR409 / AM84

Typical applications

© Copyright Altro USA 2016

Healthcare, education, senior living, dormitories, retail, offices, restaurants, general usage areas.

Slip resistance			
Static coefficient of friction	>.6 D >.7 W	ASTM D2047	greater than .6 dry, greater than .7 wet
Ramp test	R ₁₀	DIN 51130	R10
TRRL pendulum test	Pendulum text PTV ≥36	BS 7976	36+

4.60 lbs./yd ² 2.5 8mm .031"	kg/m ²			
8mm .031"				
	Altro Easyclean PUR			
	Altro Easyclean PUR			
10 product worranty		Altro Easyclean PUR		
	10 years			
	ASTM F970	2000 psi		
(((?	ISO 140-8	5dB		
	CAN/ULC - S102.2 ASTM E648 ASTM 662	Tested Class I < 450		
IÕC	CA 01350 FloorScore	Pass Certified		
bio-based content	This product is manufactured with bio-based content.			
	This product contains 5% post-consumer recycled content			
Aluminum trioxide and colored quartz aggregate throughout thickness of PVC. Colored PVC and clear PVC used to create a dimensional appearance. Altro Easyclean PUR incorporated for exceptional cleanability.				
Non-woven polyester/cellulose glass fiber reinforcement scrim				
Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads , training clinic information at altrofloors.com/training . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads . Failure to install, heat weld, and/or maintain correctly could void the warranty.				
	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.			
i i	e a dimensional appe ven polyester/cellulos oring must be installe ion procedures availa aining . Proper care c ors.com/downloads chemicals may cause	e a dimensional appearance. Altro Easyclean PUR inc ven polyester/cellulose glass fiber reinforcement scrim oring must be installed by a professional flooring insta ion procedures available at altrofloors.com/downloa aining . Proper care of Altro flooring is critical. Please ors.com/downloads . Failure to install, heat weld, an chemicals may cause staining of vinyl flooring. Traffic		

LEED facts LEED v4 This product may help contribute to the following credits 8 Altro Symphonia total qualifying credits Materials and resources 1 5% post-consumer recycled content Materials and resources 1 Rapidly renewable bio-based content Materials and resources 1 Environmental product declaration (EPD) Materials and resources 1 Health product declaration (HPD) Environmental quality 3 Low emitting materials, flooring CA 01350 Environmental quality 1 Low emitting materials, adhesives

For our full sustainability story as well as LEED, low-VOC, EPD and HPD certificates visit **altrofloors.com/sustainability**



Color shown: Crystal PH2007



www.altro.com

USA / 800 377 5597 CANADA / 800 565 4658 email info@altrofloors.com